


# JXL7

## SERIES RESIDUAL CURRENT CIRCUIT BREAKER



## SPECIFICATIONS

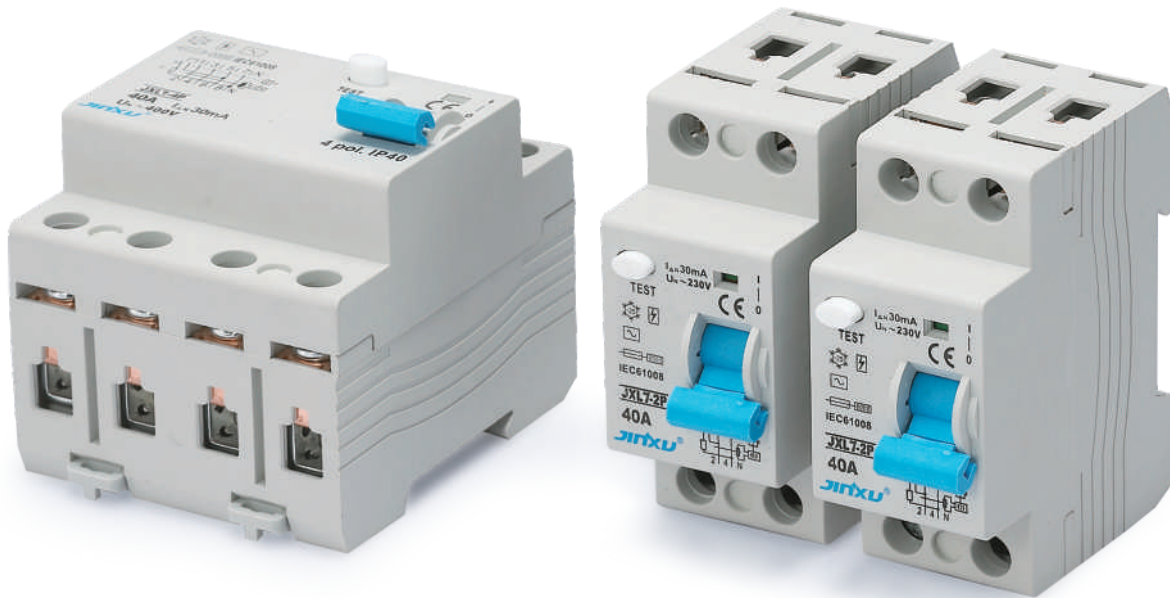

Pole No:2P、4P  
Standard:CCC,CE,CB,TUV  
Certificate:IEC61008/GB16916.1  
Product Function:Leakage protection、 Isolation function  
Rated current(A): $\leq 25$ 、 $\leq 40$ 、 $\leq 63$   
Rated voltage(V):230V/400V  
Rated frequency(Hz):50  
Sensitivity( $I_{\Delta n}$ ):30mA、100mA、300mA、500mA  
Environment temperature: $-25^{\circ}\text{C}\sim+60^{\circ}\text{C}$   
Connection type:Tunnel style、Pin style、U style  
Biggest wiring ability: $25\text{mm}^2$   
Action style:AC、A  
Installation style:Standard 35mm guide  
 $I_m$   $I_{\Delta m}$ (A):500  
Inc、 $I_{\Delta c}$ (A):6000  
Mechanical life:10000  
Protection degree:IP20